


HEATER SPACER

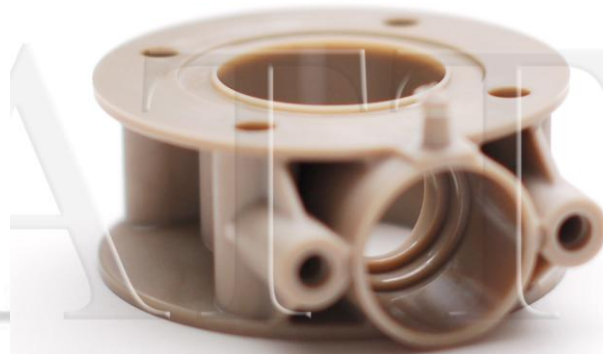

MOULDED MATERIAL	PEEK
FAMILY OF MATERIALS	PAEK ; PEEK ; PEK ; PEEKK ; PEKK ; PEKEKK (Polyariletherketone)
POLYMER'S FEATURES	<p>VICTREX® PEEK materials are based on the polyeteretherketone resin. This high technology semi crystalline thermoplastic has a unique combination of mechanical properties, temperature resistance and chemical resistance that make it the best known among the so called «advanced plastic materials».</p> <ul style="list-style-type: none"> - High maximum usage temperature in the air (250°C continuous temperature, up to 310°C for short period) - High mechanical resistance, creep stiffness and hardness, also at high temperatures - Excellent chemical and hydrolysis resistance - Excellent friction and wear resistance - Good dimensional stability - Low intrinsic flammability and very low flue gas emission during the combustion process - Good dielectric properties and electrical isolation (except for carbon-filled PEEK) - Excellent resistance to strong energy radiations (gamma and X-rays) - low viscosity which allows you to create components with reduced thickness - high elasticity that allows to create assembly without fasteners - In accordance to EU and FDA directives, concerning materials being in contact to food substances. <p>These features, if they refer to plastics used in contact with food products, added to his excellent sterizability through steam, dry heat, ethylen oxide and gamma rays make this product particularly appreciated for medical, pharmaceutical and food applications.</p>
APPLICATION FIELDS	Any fields where high performance polymers are needed, or in the production of components with minimum thickness and the need to maintain flexibility and dimensional stability with temperature extremes.
SPECIAL NOTES	<p>Cattini Engineering Plastics is recommended by: - VICTREX® : http://victrex.com -</p>